


DN	Ø D	a	b	c	h
150	141,8±0,8	11,7±0,4	4,5	8,4	14,6±0,4
200	194,0±1,0	14,7±0,4	5,2	11,7	18,7±0,4
300	284,0±2,0	20,8±0,4	6,0	18,2	26,8±0,5
400	394,0±2,0	27,5±0,5	9,0	23,5	36,0±0,6
500	491,0±2,5	33,0±1,0	10,5	25,6	41,2±1,0
600	593,0±3,0	39,5±1,0	14,7	28,1	46,0±1,0
800	788,0±4,0	46,2±1,0	18,3	39,8	60,5±1,0
1000	l=3300mm	74,0±1,0	33,2	71,0	94,0±1,0

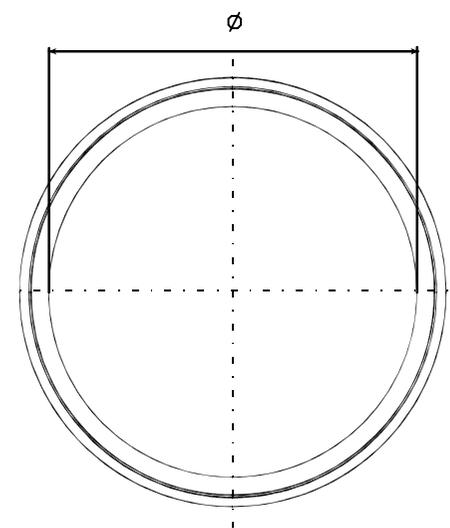

M.O.L. ROMGUM
 PRODUCENT WYROBÓW GUMOWYCH

Uszczelki INCOR

Materiał: guma zgodna
 z PN-EN681-1 o tw.60±5°IRHD